

XL LIGHTWEIGHT 13



• T-deck style option for wind turbine nacelles

- Hauls loads that normally require 19 axles
- Available in East and West coast designs
- Versatile spec features 30' long deck
- Belly pen for easier return trips
- · Detachable wheel area
- Disc brakes



de


LIGHTWEIGHT HAULING SOLUTION

130 KSI steel makes for an incredibly sturdy, yet ultralightweight unit. With base weights as low as 57,000 pounds and a capacity of 170,000 pounds overall and 170,000 pounds in 10 feet, this 3+3+3 set-up is ready to move large and unique loads.

CUSTOM-ENGINEERED FOR VERSATIILTY

Choose from various specs to make your trailer work for you. With options for both West coast and East coast set-ups, various deck designs, and the option to add deck sections into the detachable wheel area, plus a wide range of custom options, your trailer is sure to fit your specific hauling needs.

DESIGNED FOR YOU. BUILT TO LAST.

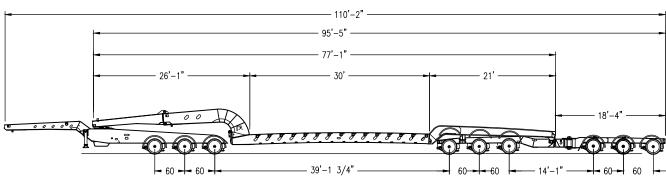

170 MECHANICAL GOOSENECK

CAPACITY

capacity: 170,000 lb overall concentrated: 170,000 lb in 10'

OVERALL LENGTH & WIDTH

overall length: 65' 3" overall width: 120"

GOOSENECK

mechanical gooseneck 14' 3" long 16" king pin setting 115" swing clearance 48" 5th wheel height brackets and frame reinforcement, air and electric flip neck 142" flip neck extension

MAIN DECK

10' wide, 30' long 26" loaded deck height 6" ground clearance 2" raised apitong decking, center deck covered (4) 20" fabricated i-beams 12" cross members on 24" centers 15 bent d-rings per side brackets for heavy duty swing out outriggers on 24" centers belly pin at front of main deck

REAR DECK

brackets for shims

2 bent d-rings in tail channel

21' long 44" loaded deck height frame reinforcement, air and electric for three axle booster 16 gauge individual stainless steel wheel covers CA legal West coast set-up detachable wheel area with horizontal pins

WHEELS & TIRES

6.75 x 17.5 steel rims 245 / 70R / 17.5 tires

SUSPENSION

25,000 lb air ride air bag shut off manual ride height control raise and lower valve

AXLES

(3) 30,000 lb nominal 97 1/2" tracking 60" axle spacing hub pilot, outboard drums 12 1/4" x 7 1/2" brakes disc brakes spring brakes on 1 axle limit chains on all axles polymer wheel covers

LIGHTING

12v sealed Grote harness rubber mounted led lights 3 tail light package 1 mid-turn signal per side 2 clearance light per side 7 pole electrical socket

3 AXLE PIVOT BOOSTER (MB)

2 pair d-rings

MB OVERALL LENGTH & WIDTH

overall length: 18'5" overall width: 120"

MB AXLES

(3) 30,000 lb nominal 97 1/2" tracking 60" axle spacing 14' 1" spread from last axle on trailer to first axle on booster spring brakes on 1 axle limit chains on all axles polymer wheel covers

MB SUSPENSION

25,000 lb air ride

air bag shut off manual ride height control raise and lower valve

3 AXLE JEEP (JPS)

2 pair d-rings

JPS OVERALL LENGTH & WIDTH

overall length: 37' 3" overall width: 120"

JPS GOOSENECK

14' 4" long 16" & 24" kingpin settings 135" & 127" swing clearance 49" 5th wheel height heavy-duty 2 speed landing gear bump up ramps to hat box 5th wheel 13HP power unit

JPS REAR DECK

hydraulic hat box 54" to 72" loaded 5th wheel height

JPS AXLES

(3) 30,000 lb nominal 97 1/2" tracking 60" axle spacing spring brakes on 1 axle limit chains on all axles polymer wheel covers

PAINT

black, IH red, CAT yellow air & electric done after paint

PAINT OPTIONS

non-standard paint colors non-standard metallic paint

WARRANTY

5 year structural 1 year paint

AVAILABLE MODELS

XLLW 13: 170 MG 3+3+3